


### ■ Features

- Collector current:  $I_c = 0.5A$

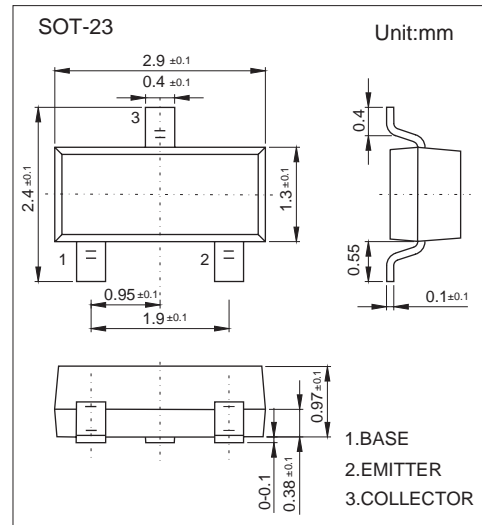

### ■ Absolute Maximum Ratings $T_a = 25^\circ C$

Parameter	Symbol	Rating	Unit
Collector-Base Voltage	$V_{CBO}$	-40	V
Collector-Emitter Voltage	$V_{CEO}$	-25	V
Emitter-Base Voltage	$V_{EBO}$	-5	V
Collector Current -Continuous	$I_c$	-0.5	A
Collector Power Dissipation	$P_c$	0.3	W
Junction Temperature	$T_j$	150	$^\circ C$
Storage Temperature	$T_{stg}$	-55 to 150	$^\circ C$

### ■ Electrical Characteristics $T_a = 25^\circ C$

Parameter	Symbol	Testconditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	$V_{CBO}$	$I_c = -100 \mu A, I_E = 0$	-40			V
Collector-emitter breakdown voltage	$V_{CEO}$	$I_c = -1mA, I_B = 0$	-25			V
Emitter-base breakdown voltage	$V_{EBO}$	$I_E = -100 \mu A, I_c = 0$	-5			V
Collector cut-off current	$I_{CBO}$	$V_{CB} = -40V, I_E = 0$			-0.1	$\mu A$
Collector cut-off current	$I_{CEO}$	$V_{CE} = -20V, I_B = 0$			-0.1	$\mu A$
Emitter cut-off current	$I_{EBO}$	$V_{EB} = -3V, I_c = 0$			-0.1	$\mu A$
DC current gain	$h_{FE}$	$V_{CE} = -1V, I_c = -50mA$	120		400	
		$V_{CE} = -1V, I_c = -500mA$	50			
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_c = -500mA, I_B = -50mA$			-0.5	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_c = -500mA, I_B = -50mA$			-1.2	V
Transition frequency	$f_T$	$V_{CE} = -6V, I_c = -20mA, f = 30MHz$	150			MHz

### ■ Classification of $h_{FE}(1)$

Type	S8550-L	S8550-H	S8550-J
Range	120-200	200-350	300-400
Marking	2TY		

Typical Characteristics

